




EFFICIENT SOLUTION FOR WATER NETWORK SAFETY

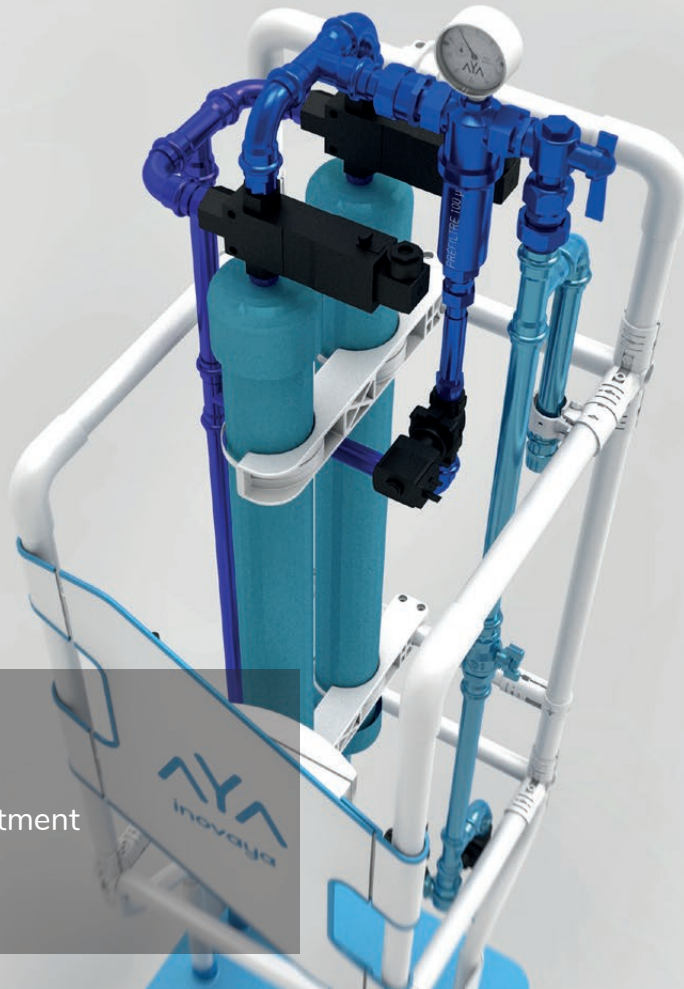

AYA APPLICATION

Process waters tertiary treatment
Tap water securing

AN ECO-FRIENDLY SYSTEM

securing any kind of non turbid fresh waters

No consumable
No chemical
Low maintenance



TECHNICAL SHEET

Dimension	H 1690 x L 500 x I 470 mm (foot included) H 1250 x L 440 x I 440 mm
Robustness	Chemical-resistant materials
Ease of use	Plug & Play
Filtration	Mechanical - High quality permeate
Flow	From 1 m ³ /h to 2 m ³ /h, or from 16,5 L/min to 33 L/min
Turbidity	Peaks at 200 NTU (2% of usage time)
Retention	Log 6 for bacteria and spores
Backwash	Depending on water quality By default: 2 times/day
Electrical characteristics	Installed power: 30W Supply voltage: 230V / 50Hz (modular)
Hydraulic characteristics	Max. circuit pressure: 3 bars Transmembrane max. pressure: 1,5 bars Temperature : 0-45°C

10 YEARS WARRANTY FILTERS

Prefilter 100 µm
Ultrafiltration

